




**SPIRAL GUARD WRAP  
TECHNICAL DATA**

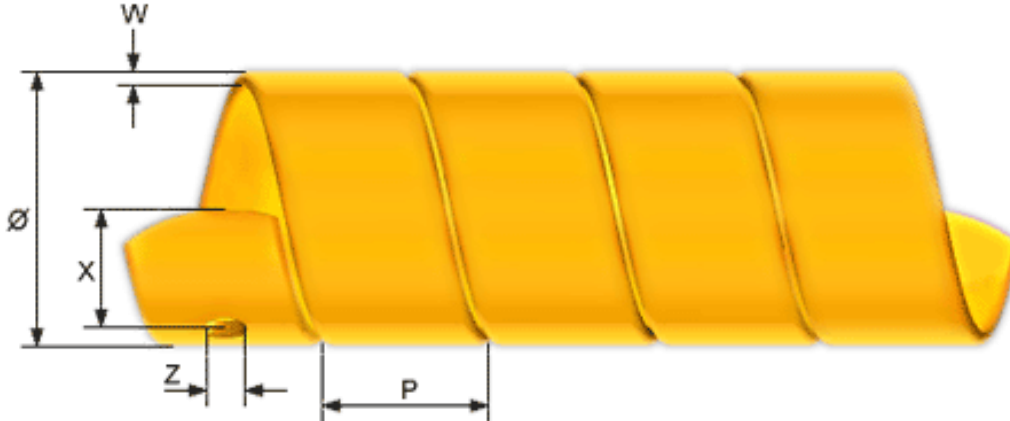

Part Number **	Nominal OD (in)	Weight (lb/ft)	Wall Thickness (in)	Pitch (in)	Hole Distance (in)	Hole Diameter (in)	Recommended usage range: [Hose OD] (in)
	Ø		W	P	X	Z	
SGW 06-	0.47	0.027	0.047	0.413			< 0.55
SGW 08-	0.63	0.040	0.051	0.472			0.51 – 0.71
SGW 12-	0.79	0.060	0.078	0.787			0.71 – 0.95
SGW 16-	0.98	0.101	0.087	0.984			0.95 – 1.10
SGW 20-	1.26	0.128	0.098	0.866			1.10 – 1.58
SGW 24-	1.58	0.202	0.106	0.945			1.38 – 1.77
SGW 32-	1.97	0.269	0.134	1.181			1.58 – 2.17
SGW 40-	2.48	0.437	0.146	1.457			2.17 – 2.44
SGW 48-	2.95	0.491	0.173	1.772	1.38	0.39	2.36 – 2.76
SGW 56-	3.54	0.806	0.193	1.772	1.38	0.39	2.76 – 3.54
SGW 64-	4.33	1.183	0.217	1.969	1.38	0.39	3.15 – 4.13
SGW 88-	5.51	1.680	0.256	2.165	1.38	0.39	4.72 – 5.91

Hose protectors are made from frost and heat resistant HDPE, suitable for temperature ranges from -58°F to +176°F.  
Made with UV Protection additives.


Tolerates acids, oils and solvents.

\*\* Available in Yellow and Black colors (Black = -30, Yellow = -50)

Hose protectors withdraw during storage and transportation, they will return to their original size when installed.



**SPIRAL GUARD WRAP**  
TECHNICAL DATA

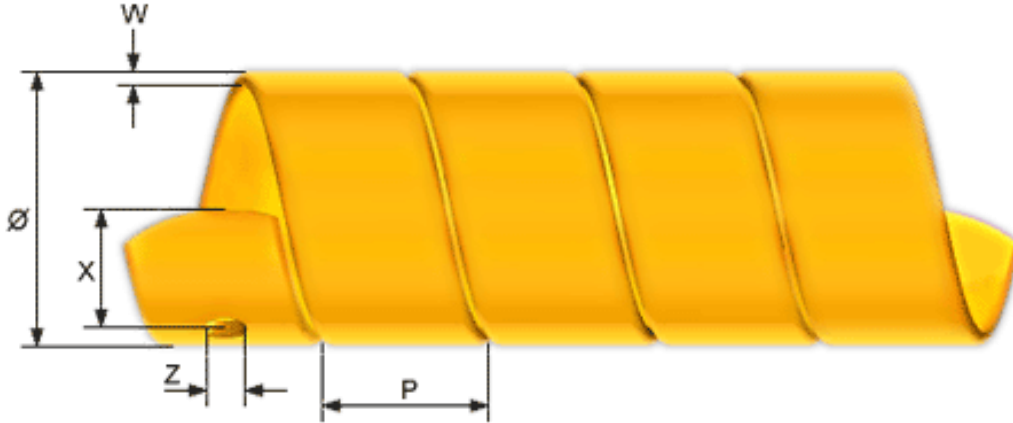

Part Number **	Nominal OD (mm)	Weight (kg/m)	Wall Thickness (mm)	Pitch (mm)	Hole Distance (mm)	Hole Diameter (mm)	Recommended usage range: [Hose OD] (mm)
	Ø		W	P	X	Z	
SGW 06-	12	0.04	1.2	10.5			< 14
SGW 08-	16	0.06	1.3	12			13 – 18
SGW 12-	20	0.09	2.0	20			18 – 24
SGW 16-	25	0.15	2.2	25			24 – 28
SGW 20-	32	0.19	2.5	22			28 – 40
SGW 24-	40	0.30	2.7	24			35 – 45
SGW 32-	50	0.40	3.4	30			40 – 55
SGW 40-	63	0.65	3.7	37			55 – 62
SGW 48-	75	0.73	4.4	45	35	10	60 – 70
SGW 56-	90	1.20	4.9	45	35	10	70 – 90
SGW 64-	110	1.76	5.5	50	35	10	80 – 105
SGW 88-	140	2.50	6.5	55	35	10	120 – 150

Hose protectors are made from frost and heat resistant HDPE, suitable for temperature ranges from -50°C to +80°C.  
Made with UV Protection additives.

Tolerates acids, oils and solvents.

\*\* Available in Yellow and Black colors (Black = -30, Yellow = -50)

Hose protectors withdraw during storage and transportation, they will return to their original size when installed.