CustomerService@atlantexmfg.com



# **PYROTEX S/G TAPE**

PRODUCT DESCRIPTION

salt water, oils and fuels, and solvents.

### SILICONE-COATED FIBERGLASS



Pyrotex S/G Tape is a flexible, non-adhesive wrap that

protects systems from damage caused by molten


splash, direct flame, and intense heat. Manufactured by

wrap easily around large diameter systems or irregular

Width		Part Number	
1"	25mm	PT16700-10	
2"	51mm	PT32700-10	
3"	76mm	PT48700-10	
4"	102mm	PT64700-10	
5"	127mm	PT80700-10	
Double-Sided Pyrotex S/G Tape			

Pyrotex S/G Tape

Double-Sided Pyrotex S/G Tape			
Width		Part Number	
1"	25mm	PT16700-10DS	
2"	51mm	PT32700-10DS	
3"	76mm	PT48700-10DS	
4"	102mm	PT64700-10DS	
5"	127mm	PT80700-10DS	

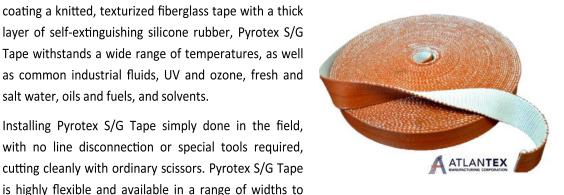



## **WORKING TEMPERATURE**

CONTINUOUS: 500°F / 260°C MINIMUM: -65°F / -54°C INTERMITTENT: 2200°F / 1200°C 3000°F / 1645°C **SHORT TERM:** 

#### **ACCREDATIONS**

- **REACh & RoHS Compliant**
- Made in USA

#### MATERIAL COMPOSITION

- Highly texturized E-Glass fiber
- Knitted insulating substrate
- High-temperature silicone

#### **AVAILABILITY**

- Standard packaging: 100 ft. roll
- Stock product for fast shipping
- Pre-cut pieces and bulk lengths
- 1" through 5" width
- Stocked in standard red/orange
- 7 coating colors available

#### **ADDED VALUE**

- Custom layline printing available
- Wider tape available, slit from knit Pyrotex firesleeve
- Double-sided silicone coating available

